


Product Highlights

- Two line 16 character back lit display
- Two models of operation; display and EZcal
- Display mode: battery level, hours and error codes
- EZcal mode: calibrations, diagnostics and adjustments
- Easy and intuitive screen selection navigation
- Complete with mounting hardware
- Optional: customer specified front panel

EZcal Mode



In EZcal mode perform Diagnostics, Adjustments, Setups& calibrations



Use Left Right arrows to select Menu Option



Use Up Down arrows to edit option



Display Mode




Two line 16 character display configurable to display OEM specified parameters



Technical Data

Power Supply	12/24V	8.5 to 33 Vdc
Bus. protocol	RS232	
Water Proof	IP66/IP54	See note 1
Working Temperatures	-20°C to +60°C	Ambient temperature
Overall Dimensions	4.375" x 3.563" x 0.871" 11.113 x 9.1 x 2.2 mm	L x W x H

Dimensions

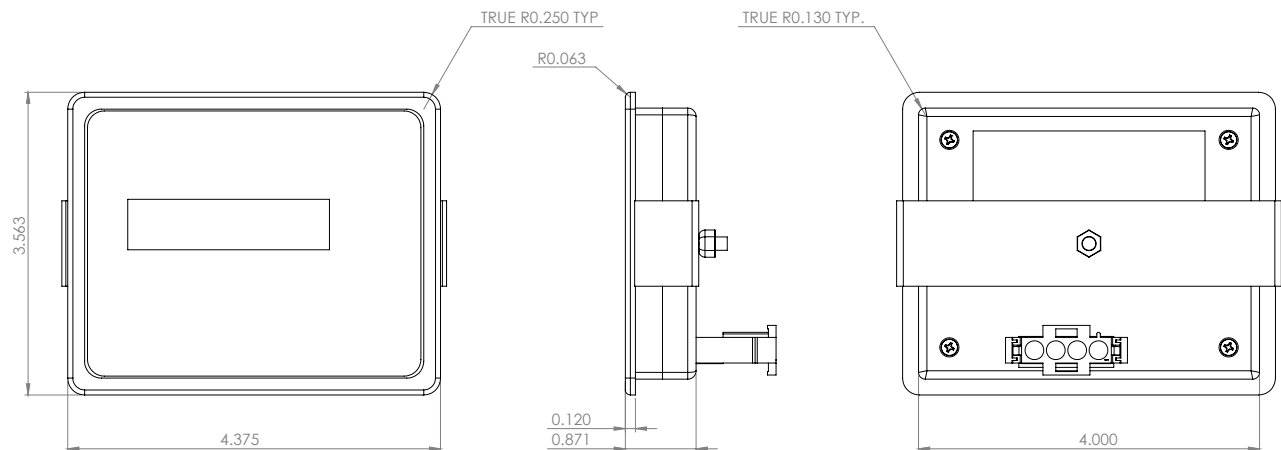

Mounting Instructions

- The module should be mounted on a vertical surface:



Note 1: IP66 from the front
IP54 from the back