



Quad H-Bridge

Product Highlights

- Four H-bridge outputs can switch direction of four motors, or
- Eight discrete outputs switched to B+ or B-
- Internal current monitors shut down output pairs at a specified over-current up to 12 Amps.




TRIONIC
vehicle controls

General Features

- 4 H-bridge outputs or 8 discrete outputs to B+ or B-
- 4 current monitors between four pairs of outputs
- Current overload shutdown
- CAN based

Dimensions

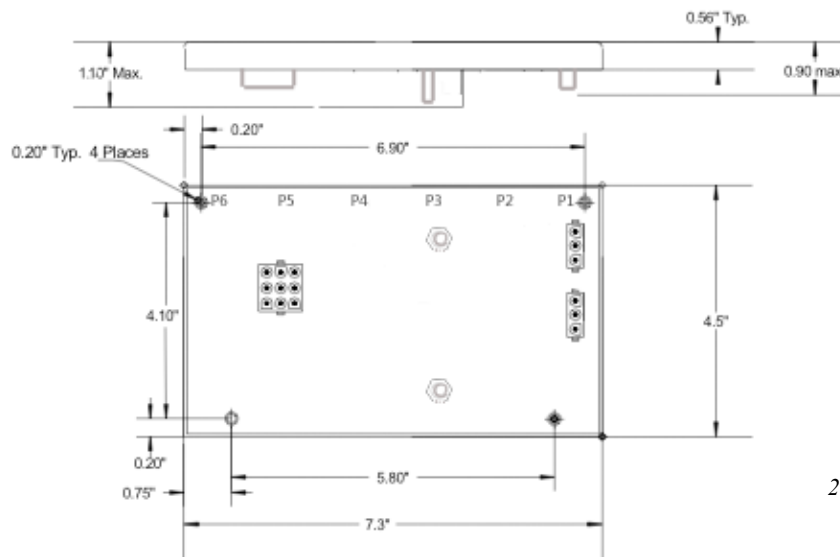

Overall Dimensions
7.3" x 4.5" x 1.3"
186 x 115 x 34 mm

2 – M6 Studs

Technical Data

Power Supply	12/24V		8.5 VDC to 33VDC
H-bridge Outputs	8 A	protected	S/C protected
Internal current monitors	4		
Water Proof	IP 67		
Working Temperature	-40 + 60°C		
Overall Dimensions	7.3" x 4.5" x 1.3"		L x W x H
	186 x 115 x 34 mm		

EUROPE
Trionic Mobility Systems, SAS

AMERICAS
PG Trionic, Inc.

ASIA
Trionic Shenzhen Ltd.

www.trionigroup.com