



24V Half Bridge

Product Highlights


- Internal current monitors limit the 24V Half Bridge at a specified maximum current



General Features

- Maximum current limited
- Temperature limited
- CAN based

Dimensions

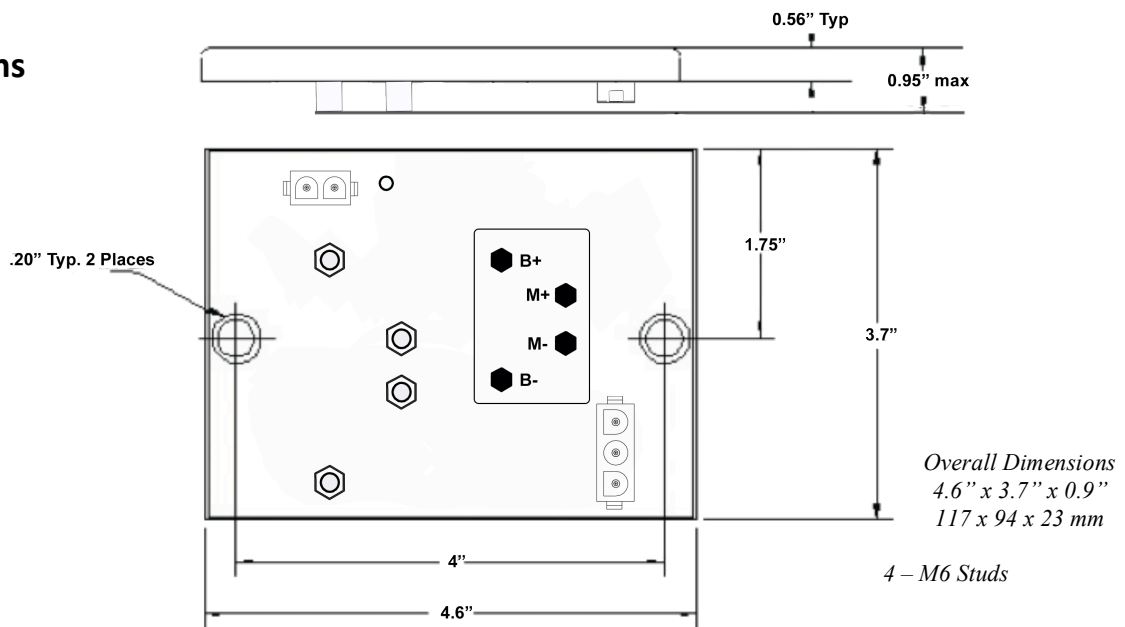

Technical Data

Power Supply	24V		16 VDC to 33VDC
Maximum Current Output	40 A		
Constant Running Current	25 A @ 25°C		
Water Proof	IP 67		
Working Temperature	-40 + 60°C		
Overall Dimensions	4.6" x 3.7" x 0.9"		L x W x H
	117 x 94 x 23 mm		

EUROPE
Trionic Mobility Systems, SAS

AMERICAS
PG Trionic, Inc.

ASIA
Trionic Shenzhen Ltd.

www.trionigroup.com